


MIRAGE

D O O R S

SERIES 3 MOTORISED SHUTTERS SUGGESTED PLAN DETAILS AND BULKHEAD CLEARANCES

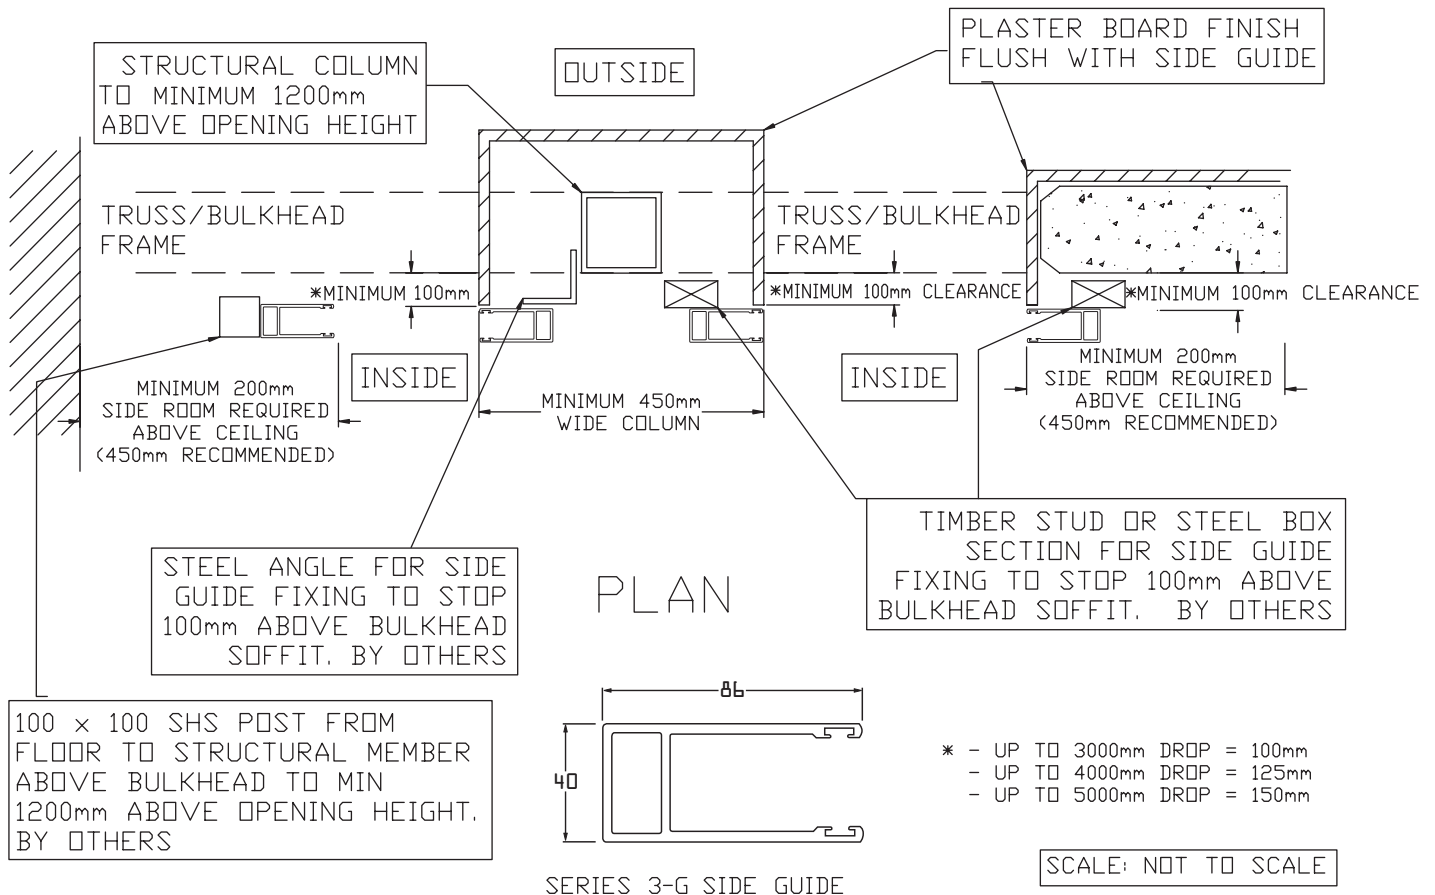

| Refer | MIRAGE TYPICAL DIMENSIONS REQUIRED FOR VARIOUS DROPS | | | | | | | | | | |
|--------------------|---|--|------|------|------|------|------|------|------|------|------|
| Diagrams (Sheet 5) | Drop Height | 1800 | 2100 | 2400 | 2700 | 3000 | 3300 | 3600 | 3900 | 4200 | 4500 |
| 1 | Bundle Dia | 360 | 370 | 380 | 390 | 400 | 410 | 420 | 430 | 440 | 450 |
| 2 | Min Vertical Clearance Motor Below (mm) - A | 860 | 885 | 890 | 895 | 900 | 905 | 910 | 915 | 920 | 925 |
| 3 | Min Vertical Clearance Motor Above (mm) - B | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 | 1200 |
| 4 | Min Vertical Clearance Motor Behind (mm) - C | 680 | 690 | 700 | 710 | 720 | 730 | 740 | 750 | 760 | 770 |
| | Min Total Horizontal Internal Bulkhead Clearance Required | Refer to Sheet 5 Drawings for Operational Clearances | | | | | | | | | |

Mirage Doors has a continuous program of product development and reserves the right to change specifications at any time without notice.

- PLEASE NOTE:
- IF INADEQUATE ACCESS IS PROVIDED MIRAGE WILL NOT BE HELD RESPONSIBLE FOR MAINTENANCE NOR THE COSTS INCURRED TO CREATE ADEQUATE ACCESS
 - MIRAGE SERIES 3 ROLLER SHUTTERS WEIGH APPROXIMATELY 25KG/M², THEREFORE THE SHUTTERS MUST BE INSTALLED TO STRUCTURAL SUPPORTS, I.E. RHS STEEL POSTS, CORE FILLED MASONRY, TILT UP CONCRETE PANELS
 - ALL STRUCTURAL SUPPORTS FOR BRACKETS AND SIDE GUIDES TO BE PROVIDED BY OTHERS
 - THE ABOVE DETAILS ARE ONLY APPLICABLE TO THE MIRAGE SERIES 3 ROLLER SHUTTER
 - ALL WIRING AND SETTING OF LIMITS BY OTHERS