


# SERIES 2000 HINGEAWAY

BALANCED COUNTERWEIGHT DOOR



## RECOMMENDED SPECIFICATIONS

Series 2000 Hingeaway Counterweight balanced door as manufactured by Mirage Industries Pty Ltd., Australia.

## APPLICATIONS

Industrial and Commercial applications where minimal internal projection and minimal headroom is required.

## STANDARD DESIGN

Doors are constructed from rectangular hollow section steel and suitably braced for minimum deflection in the open and closed position. The standard design is based on 0.5 kPa wind load. This may be altered to suit particular situations. The desired wind load must be stated, when specified.

## GLAZING

Doors may be fully or partially glazed to suit architectural requirements. Refer to manufacturer. Kick panel will vary depending on width of door.

## CLADDING

Colourbond®, Steel Sheet, Bar Grille, A.R.C. Mesh, Timber, Glass, etc.

## LOCKING

For manually operated doors, sliding pad-bolts to the bottom of each side. (Padlocks supplied by others).

## FINISH


Standard finish on frames and channels, prime - painted. Other options include painting or powdercoating. Aluminium glazing trim- either anodised or powdercoated.

## OPTIONAL EXTRAS

- Access doors within the door / outward opening.
- Motorised.
- Control systems that may include induction loop and /or photoelectric cells.
- Remote control.

Call 1800 465 599 or visit [www.miragedoors.com.au](http://www.miragedoors.com.au)



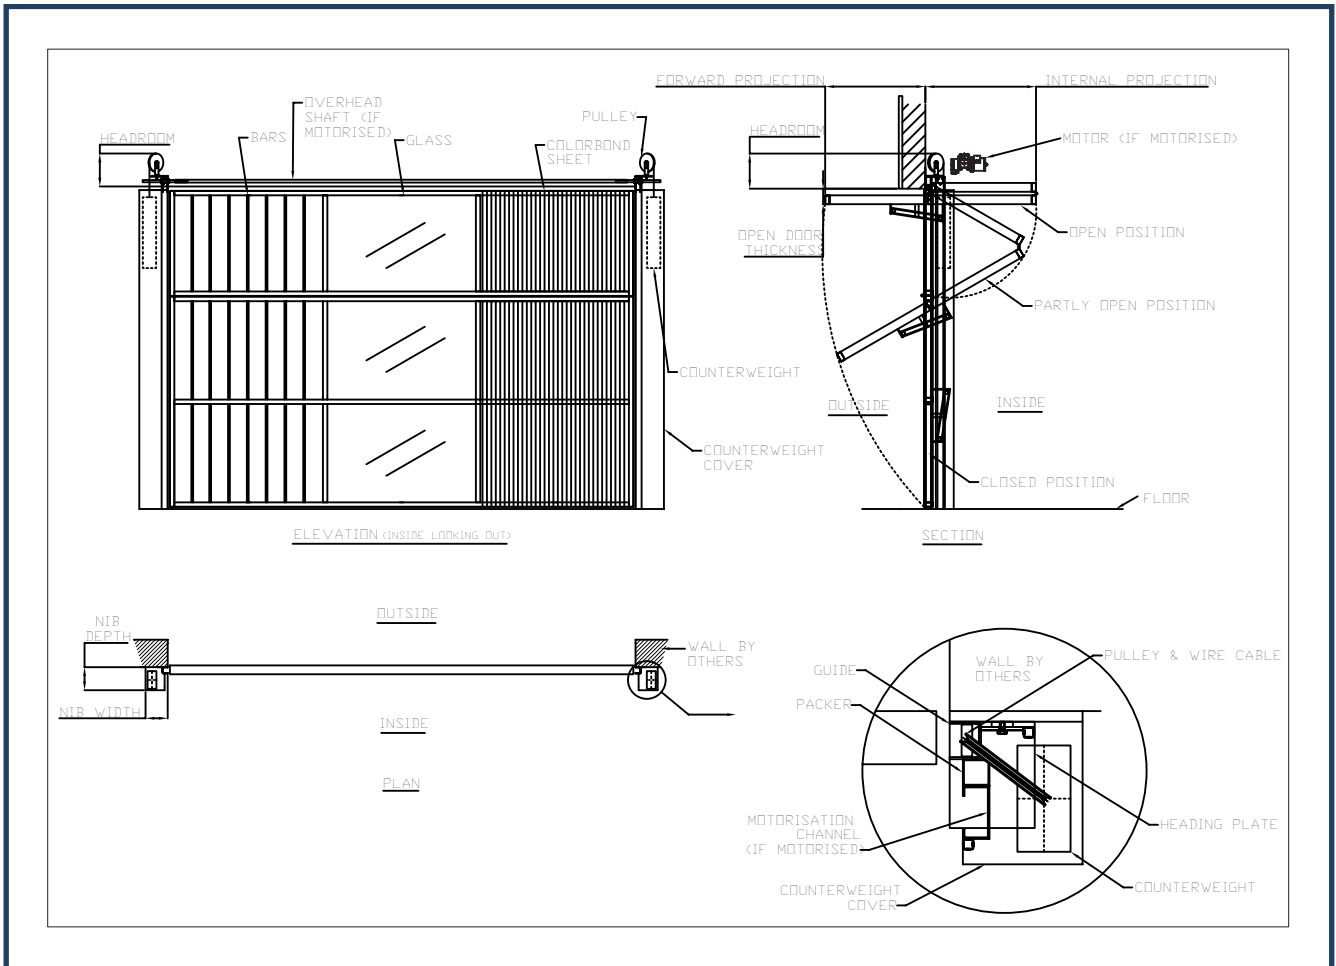

Mirage has a continuous program of product development and reserves the right to change specifications at any time without notice.

\*Roll formed windlock guide sketch

### Mirage Counterweight Doors - Operational Clearances

Note: These dimensions are a guide only, and may vary according to site restrictions or door design features e.g. windloads, cladding, structural columns. For project - specific details please contact your nearest Mirage Industries representative.

Item	Door Width	Door Width	Door Width
<u>2000 SERIES HINGEAWAY DOOR</u>	Up to 3000mm	3000mm - 7000mm	7000mm - 10000mm
Nib Width	160mm - 200mm	200mm - 250mm	250mm - 400mm
Nib Depth	190mm - 220mm	220mm - 250mm	250mm - 400mm
Forward Projection ( approx. )	35 * 50% of door height	35 - 50% of door height	35 - 50% of door height
Internal Projection ( approx. )	25 - 35% of door height	25 - 35% of door height	25 - 35% of door height
Headroom - Manual Door	200mm	300mm	375mm
Headroom - Motorised Door	400mm	400mm	400mm
Open Door Thickness	150mm	250mm	300mm

\* To be read in conjunction with the sales brochure "Series 2000 - Hingeaway" Counter weight Door.

Call 1800 465 599 or visit [www.miragedoors.com.au](http://www.miragedoors.com.au)

